
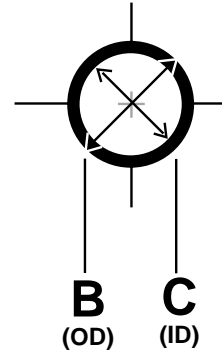


Material Type

TECHFLEX Expandable Sleeving

Grade

FR

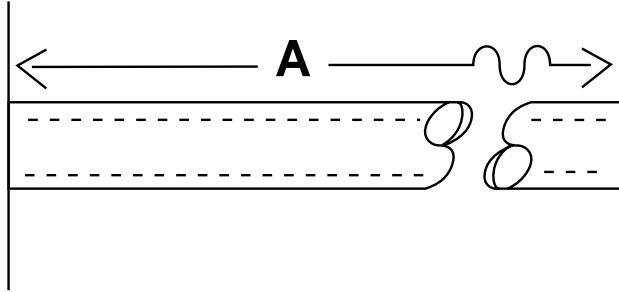

Size	Min	Max	A Length	B (OD)	C (ID)	Weight /1000'	Ends	Carriers
1/8"	3/32"	1/4"	1000'	.175"	.125"	1.6 lbs.	1	32
1/4	1/8	7/16	1000	.30	.25	2.4	1	48
3/8	3/16	5/8	500	.425	.375	5.7	3	36
1/2	1/4	3/4	500	.55	.50	7.7	3	48
3/4	1/2	1-1/4	250	.80	.75	12	3	72
1-1/4	3/4	1-3/4	250	1.30	1.25	16	3	96
1-1/2	1	2-1/2	200	1.55	1.5	19.6	4	96
1-3/4	1-1/4	2-3/4	200	1.80	1.75	27	4	120
2	1-1/2	3-1/2	200	2.05	2.0	33	4	120
2-1/2	1-3/4	4-1/2	200	2.55	2.5	38	6	120
3	2-1/2	4-3/4	100	3.05	3.0	40	5	144

Bulk Spools Available: Lengths vary according to size. Custom Cut lengths available.

Colors Available: Black with a white crisscross tracer, White with a black crisscross tracer

Splice/Spool: <2 or no greater than 1(as shown on Table A)

Material **FR Flame Retardant**
Polyethylene Terephthalate

Monofilament Thickness **.010"**


- Heat Treated
- Rounded



File# LR 66-145



File# E 107 055



TECHFLEX Inc.

29 Brookfield Drive • P.O. Box 119 • Sparta, NJ 07871
1.800.323.5140 • 973.300.9242 • 973.300.9409 fax
www.techflex.com



Drawing Number **TF001FR-WD**

Approved _____ Date _____