

# Flexo Conductive



- **Economical & Easy to Install**
- **Cut & Abrasion Resistant**
- **Expands up to 150%**
- **Halogen Free**
- **Resists Gasoline and Engine Chemicals**
- **EMI, RFI Protection**
- **Superior Static Dissipation**

## Conductive Carbon Infused Nylon For Static Protection and Shielding

CN is braided from 11 mil carbonized Nylon® monofilament yarn. CN is designed to protect sensitive wiring from abrasion while shielding it from high frequency noise. Many successful applications have utilized CN for maintaining clean video signals, interference filtering in pro sound environments, and RF filtering on power cables and outputs. CN is also useful in static sensitive environments.


CN utilizes a patented carbonization process which infuses our braided sleeving with a microscopic carbon compound that is virtually indistinguishable from the base material. The result is a strong, long lasting jacket that is ready for the most sensitive applications.




Clean signals without excessive noise can be achieved with properly isolated cables and wires.

“Techflex assures maximum protection for delicate video and data lines”

Tim Daly - Emmy Award Winning Engineer  
InterTest - [www.intertestinc.com](http://www.intertestinc.com)

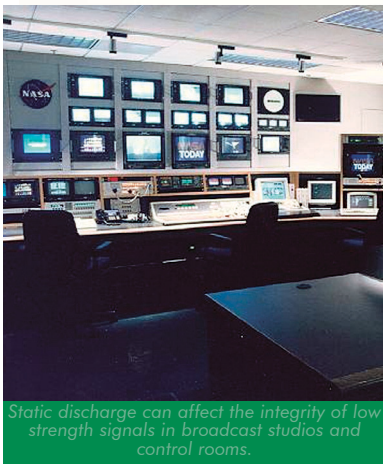

Static discharge can affect the integrity of low strength signals in broadcast studios and control rooms.

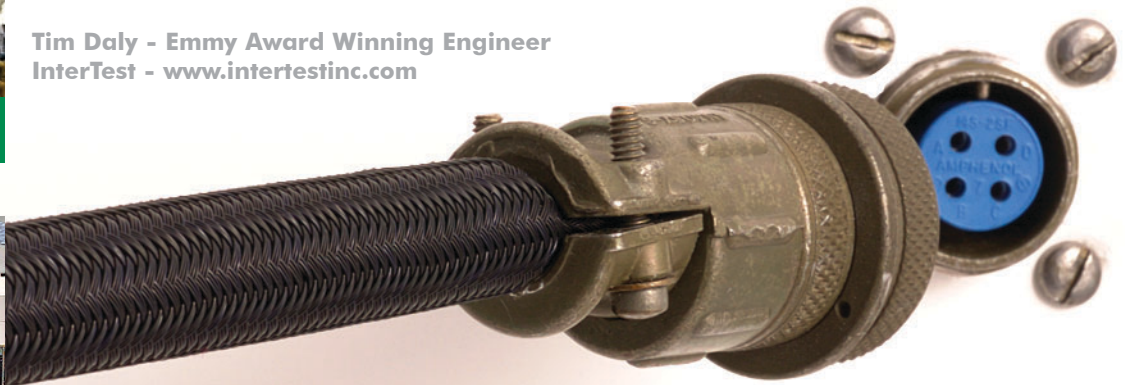

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Mini Spool		
1/4"	CNN0.25	1/8"	7/16"	1000'	200'	Black	.23
3/8"	CNN0.38	3/16"	5/8"	500'	125'	Black	.51
1/2"	CNN0.50	1/4"	3/4"	500'	100'	Black	.68
3/4"	CNN0.75	1/2"	1 1/4"	250'	75'	Black	1.0
1 "	CNN1.00	5/8"	1 5/8"	250'	65'	Black	1.2

