

# VDV MapMaster™ 3.0 Cable Tester



*Professional Grade  
for Everyday Use*



## VDV MapMaster 3.0™

The **VDV MapMaster™ 3.0** combines continuity testing, mapping, generating tones and length measurement functions into a single easy-to-use unit for installation, troubleshooting, and maintenance for telco, network, or coax cable. The backlit display, glow-in-the-dark keypad and a built-in flashlight helps you to work in the dark. Whether your jobs are commercial or residential, the versatility and added features of the VDV MapMaster 3.0 makes it a best value cable verifier for the professional installer!

### Key Features

- Detects Open, Shorts, Miswires, Reverses & Split Pairs
- Tests to T568A/B wiremap configuration: shorts, opens, miswires, reverses and split pairs
- Single-ended Testing for Shorts & Split Pairs
- Measures Length in Feet/Meters
- Identifies cable location on active ports using flashing Port Link Light
- Easy to read, backlit LCD screen with large icons, glow-in-the-dark keypad and built-in LED flashlight for use in dark areas
- Verifies continuity for multiple cable types (LAN, Phone and Video)
- Audible beep for additional feedback
- Identify up to 20 network or coax cable runs at a time
- Measures cable length, distance to opens and breaks specific wires, pairs or all wires simultaneously
- Master remote stored in main unit
- Voltage detection warning icon
- Continuous loop test mode for trouble shooting
- Auto-off and timed backlight in any mode for low power consumption and long battery life
- Audible Tone Generator, 4 selectable cadences



Tone Generation



VDV Interface

**We Make Connections EZ!™**

California, USA


Phone: 805.384.2777/800.749.5783 • Fax: 800.749.5784

[www.platinumtools.com](http://www.platinumtools.com)



Easy to read, backlit LCD screen with large icons, glow-in-the-dark keypad and built-in LED flashlight for use in dark areas

## Sample Screen Shots

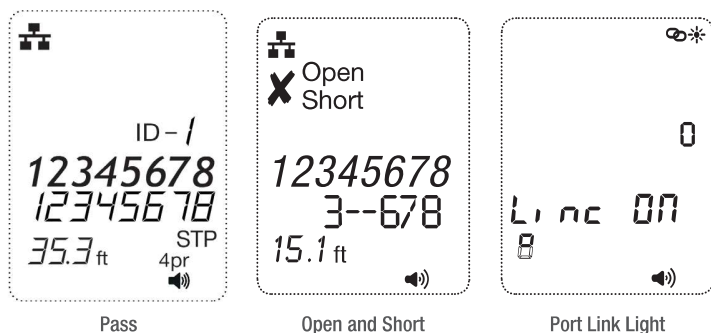

Pass

Open and Short

Port Link Light

## Available Kits and Ordering Information



**T130**  
VDV MapMaster 3.0  
Tester Only



**T130K2**  
VDV MapMaster 3.0  
PRO Kit



**T130K1**  
VDV MapMaster 3.0  
Cable Tester Kit



**T130K3**  
VDV MapMaster 3.0  
Deluxe PRO Kit

## VDV MapMaster™ 3.0 Cable Tester Specifications

Display	Large 2.75" Backlit Monochrome LCD
Dimensions	6.8" x 3.2" x 1.4" (17.3 x 8.1 x 3.5 cm)
Weight	10.8 oz. (305 grams) with battery and remote
Operating Temperature	0°C/32°F to 50°C/122°F
Storage Temperature	-20°/-4°F to 60°C/140°F
Humidity	10% to 90%, non-condensing
Maximum Voltage between any two connector pins without damage	RJ12/RJ45/F: 50V DC or AC
Battery Life	9V alkaline battery typical Standby: 4 years Active: 425 hours
Cable Types:	Shielded or Unshielded; CAT7, CAT6A, CAT5e, CAT5, CAT4, CAT3, Coax
Maximum RJ Cable Length Testing	0 to 1,000 feet (305 meters)
Minimum Cable Length for Split Pair Detection	1.5 feet (0.5 meters)
Maximum Coax Cable Length	Varies depending on cable resistance varies
Low Battery	Icon flashes when battery voltage falls below 6V
Measurement Technology	Capacitance testing
Length Accuracy Without Length Constant	± 3% plus + 1 foot
Default Length Constant (Restored with power on reset)	Voice (Twisted pair): 17.4 pF/ft Video (Coax): 16.5 pF/ft Data (Twisted pair): 15 pF/ft
Warranty	Limited 1 yr

## Accessories

<b>TP250C</b>	ToneSeeker Inductive Probe
<b>21025C</b>	Port Saver Adapter
<b>T139</b>	Smart Remote Kit with Remote Set #2-8
<b>TRK010</b>	Network Accessory Kit
<b>TRK120</b>	ID-Only Coax Remote Set, #1-20
<b>TRK220</b>	ID-Only Network Remote Set, #1-20
<b>610025C</b>	FTP Patch Cable, 5" CAT6, 4 pcs
<b>T125C</b>	Toner Cable RJ45-to-Alligator
<b>4007</b>	Hanging Pouch
<b>4008</b>	Large Shoulder Bag
<b>4082</b>	Durable Plastic Case



**T130K4**  
Network & Coax Field Kit

California, USA

Phone: 800.749.5783 • Fax: 800.749.5784

[www.platinumtools.com](http://www.platinumtools.com)

**We Make Connections EZ!™**

Specifications subject to change without notice.

©2018 Platinum Tools, Inc. All Rights Reserved. VDV MapMaster 3.0 9/18 JB