

Heavy Wall

- 950 Cycles*
- Braided from 15 mil PET Monofilament
- Extreme Abrasion & Cut Resistance
- UV Resistant
- Resists Gasoline, Solvents, Salt Water and Chemicals
- Temp. Range -94°F to 257°F
- Melt Temp. 482°F


50% Thicker for The Really Abrasive Jobs

When your application calls for more protection than our 10 mil products provide, our 15 mil FLEXO HEAVY WALL (HW) is the ideal solution.

HW is commonly used in industrial and marine applications where extreme abrasion protection is critical. The durability of HW makes it ideal for protecting hoses and cables that have to withstand constant contact with rough and abrasive surfaces.

HW is the perfect solution for use on hoses, cables and chains to protect painted or laminated surfaces from scuffing and wear.

MARINE INDUSTRY PROVEN FOR OVER 30 YEARS

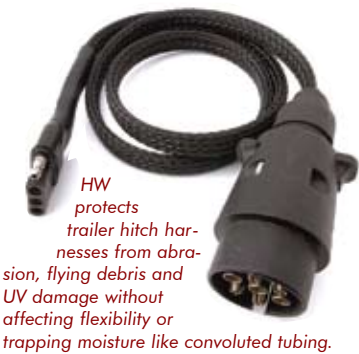

Nominal Size	Part #	Expansion Range		Standard Spool Put-Ups		Available Colors	Lbs/100'
		Min.	Max.	Bulk Spool	Shop Spool		
3/8"	HWN0.38	3/16"	3/4"	500'	100'	CL, CB & BK	0.82
5/8"	HWN0.63	5/16"	7/8"	250'	75'	CL, CB & BK	1.10
1"	HWN1.00	1/2"	1 1/2"	250'	50'	CL, CB & BK	1.60
1 1/2"	HWN1.50	3/4"	2"	250'	50'	CL, CB & BK	2.50
2"	HWN2.00	1 1/2"	3"	200'	50'	CL, CB & BK	3.40
3"	HWN3.00	2"	4"	100'	50'	CL, CB & BK	4.20
4"	HWN4.00	2 1/2"	5 1/2"	100'	50'	CL, CB & BK	6.50

800 323-5140
www.techflex.com



*Abrasion Resistance

630	950	2,500	3,500	4,400	8,500	13,000
-----	-----	-------	-------	-------	-------	--------

HIGH

EXTREMELY HIGH

