


- Specialized Lightweight Resin Coating
- Will Not Fray When Cut With Scissors
- Expands Up To 150%
- Designed For Versatility Of Installation
- High Abrasion Resistance

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
1/8"	PTP0.13BK	1/16"	1/4"	1,000'	225'	Black BK	0.2
1/4"	PTP0.25BK	1/8"	3/8"	1,000'	200'	Black BK	0.3
3/8"	PTP0.38BK	3/16"	5/8"	500'	125'	Black BK	0.6
1/2"	PTP0.50BK	1/4"	3/4"	500'	100'	Black BK	0.8
5/8"	PTP0.63BK	3/8"	1 1/8"	500'	100'	Black BK	0.9
3/4"	PTP0.75BK	1/2"	1 1/4"	250'	75'	Black BK	1.2
1 1/4"	PTP1.25BK	3/4"	1 1/2"	250'	50'	Black BK	1.6
1 1/2"	PTP1.50BK	1"	1 3/4"	200'	40'	Black BK	2.5
1 3/4"	PTP1.75BK	1 1/4"	2 3/4"	200'	30'	Black BK	2.7
2"	PTP2.00BK	1 1/2"	3 1/2"	200'	50'	Black BK	2.8

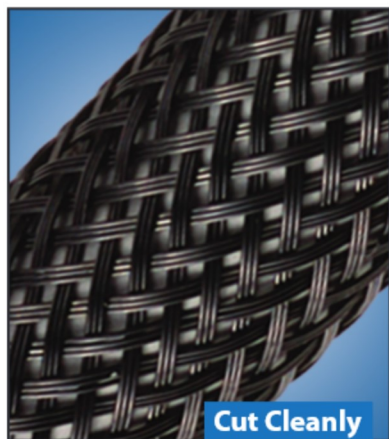

Cut Cleanly
Scissors

Material

Polyethylene Terephthalate

Grade

PTP

Monofilament Diameter

.010"

Drawing Number

TF001PET-WD


Flexo® PET PLUS Lightly Coated Expandable Sleeving For Easy Cutting And Durability

FLEXO® PET PLUS (PTP) has all the qualities of our legendary Flexo® PET, plus a highly specialized, fray-resistant resin coating that facilitates easy cutting with scissors.

Flexo® PET Plus is an elegant and economical choice for projects that call for versatility of installation and for situations where access to a hot knife is impossible. It cuts easily and cleanly with ordinary scissors.

In addition, Flexo® PET Plus has a wide operating temperature range and is resistant to chemical degradation, UV radiation, and abrasion.

Colors Available:
Black (BK)

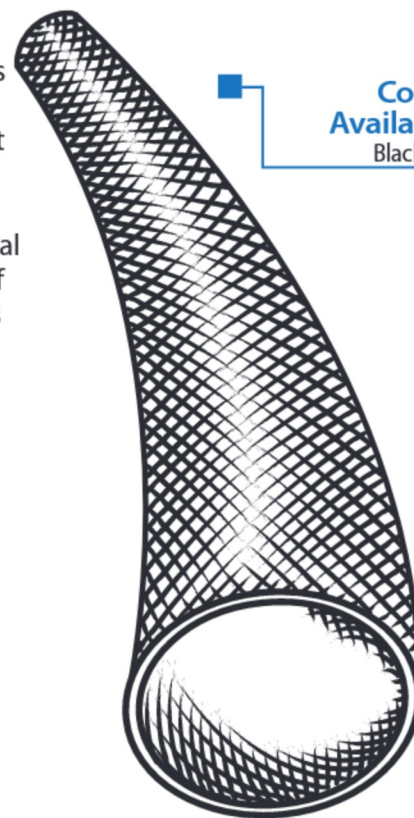

Will Not Fray When Cut With Scissors

TECHFLEX®
Braided Sleeving Products

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

ABYC
Setting Standards for Safer Boating

FAR-25



ABRASION FLAMMABILITY

Abrasion Resistance
High

Abrasion Test Method
SAE ARP 1536

Abrasion Test Machine
Abrasion Machine
IIEA-01

Abrasion Spec
30,000 Cycles Min.

Abrasion Force
2.5lb (1.1kg)

Abrasive Element:
0.5 (13mm)
precision ground
drill rod, 60-64 HRC /
16 Ra.

Two Broken Filament
300 Test Cycles

**Partial wear of upper and
lower filaments, contact
between mandrel and tool**
Average 86,820 Test
Cycles

Rating _____ UL94VO, FAR25,
FMVSS-302

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

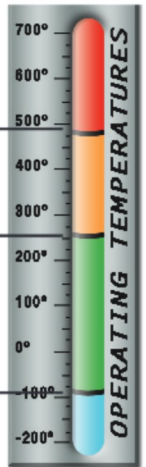

PHYSICAL PROPERTIES

Monofilament Diameter _____	.010"
ASTM D-204	
Flammability Rating _____	UL94
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	1
Wall Thickness _____	.018" - .025"
Tensile Strength (Yarn) _____	7.5
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.38
Moisture Absorption _____	.1-.2
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.19
CVCN _____	.00
WVR _____	.16
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	Med
Oxygen Index _____	21
ASTM D-2863	

© 2021 Techflex® - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex® is strictly forbidden.

Techflex® product names and logos are registered trademarks of Techflex®, unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex® makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex®'s only obligations are those in standard terms of sale for these products and Techflex® will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions. Users should make their own evaluation to determine the suitability of these products for their unique and specific applications.