



ACRYLIC FLEX GLASS

- **Rated to 155°C Class F**
- **UL Recognized File# E329693**
- **Grade A (7,000 V)**
- **Grade C (2,500 V)**
- **Cut and Abrasion Resistant**
- **Excellent Low Temp. Flexibility -13°F**
- **Resists Acids and Most Organic Solvents**



Cut Cleanly
Scissors

Material

Acrylic Coated Fiberglass

Grade

A & C

Wall Thickness

.014" - .040"

Acrylic Resin Coated Fiberglass Sleeving Grade A & C

ACRYLIC FLEX GLASS (AG) sleeving is a heat-treated, tightly braided fiberglass sleeving coated with a dielectric acrylic resin. This durable sleeving will withstand mechanical stress and holds its dielectric strength on all bends.


Acrylic Flex Glass is used in applications such as relays, radio circuits, transformers, and lead/crossover protection on motors. Highly resistant to acids and solvents, and will withstand tough assembly handling. Sleeving is recommended for thermal requirements from 105°C (221°F) to 155°C (311°F) ranges.

Colors Available:




Yellow (YL), Natural (NT), Black (BK) and Red (RD).

■ **Colors Available:**
4= YL, NT, BK, & RD.

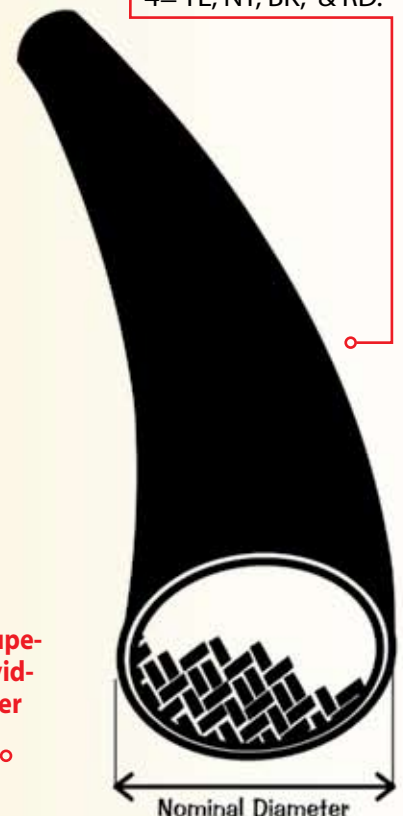

■ **Acrylic Resin Coated Flex Glass sleeving has superior mechanical and electrical properties, providing its rated dielectric strength during and after the most severe handling in your application.**



TECHFLEX
Braided Sleeving Products

www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
29 Brookfield Dr • Sparta, NJ 07871





ACRYLIC FLEX GLASS

								Put-Ups		
Nominal Size	Diameter	Part#	Grade	Wall Thickness (Grade A)	Part#	Grade	Wall Thickness (Grade C)	Bulk Spool	Shop Spool	Available Colors
24	0.022"	AGAG.24	A	.018"	AGCG.24	C	.014"	500'	250'	YL,NT,BK,RD
22	0.027"	AGAG.22	A	.018"	AGCG.22	C	.014"	500'	250'	YL,NT,BK,RD
20	0.034"	AGAG.20	A	.018"	AGCG.20	C	.014"	500'	250'	YL,NT,BK,RD
18	0.042"	AGAG.18	A	.018"	AGCG.18	C	.014"	500'	250'	YL,NT,BK,RD
16	0.053"	AGAG.16	A	.020"	AGCG.16	C	.016"	500'	250'	YL,NT,BK,RD
14	0.066"	AGAG.14	A	.020"	AGCG.14	C	.016"	500'	250'	YL,NT,BK,RD
12	0.085"	AGAG.12	A	.022"	AGCG.12	C	.017"	250'	100'	YL,NT,BK,RD
11	0.095"	AGAG.11	A	.022"	AGCG.11	C	.017"	250'	100'	YL,NT,BK,RD
10	0.106"	AGAG.10	A	.022"	AGCG.10	C	.017"	250'	100'	YL,NT,BK,RD
9	0.118"	AGAG.09	A	.024"	AGCG.09	C	.019"	250'	100'	YL,NT,BK,RD
8	0.133"	AGAG.08	A	.024"	AGCG.08	C	.019"	250'	100'	YL,NT,BK,RD
7	0.148"	AGAG.07	A	.024"	AGCG.07	C	.019"	250'	100'	YL,NT,BK,RD
6	0.166"	AGAG.06	A	.024"	AGCG.06	C	.019"	250'	100'	YL,NT,BK,RD
5	0.186"	AGAG.05	A	.028"	AGCG.05	C	.023"	250'	100'	YL,NT,BK,RD
4	0.208"	AGAG.04	A	.028"	AGCG.04	C	.023"	250'	100'	YL,NT,BK,RD
3	0.234"	AGAG.03	A	.028"	AGCG.03	C	.023"	250'	100'	YL,NT,BK,RD
2	0.263"	AGAG.02	A	.028"	AGCG.02	C	.023"	250'	100'	YL,NT,BK,RD
1	0.294"	AGAG.01	A	.028"	AGCG.01	C	.023"	100'	50'	YL,NT,BK,RD
0	0.330"	AGAG.00	A	.028"	AGCG.00	C	.023"	100'	50'	YL,NT,BK,RD
3/8"	0.375"	AGA0.38	A	.034"	AGC0.38	C	.030"	100'	50'	YL,NT,BK,RD
7/16"	0.438"	AGA0.44	A	.034"	AGC0.44	C	.030"	100'	50'	YL,NT,BK,RD
1/2"	0.500"	AGA0.50	A	.034"	AGC0.50	C	.030"	100'	50'	YL,NT,BK,RD
5/8"	0.625"	AGA0.63	A	.034"	AGC0.63	C	.030"	100'	50'	NT
3/4"	0.750"	AGA0.75	A	.040"	AGC0.75	C	.038"	100'	50'	NT
7/8"	0.875"	AGA0.88	A	.040"	AGC0.88	C	.038"	100'	50'	NT
1"	1.000"	AGA1.00	A	.040"	AGC1.00	C	.038"	100'	50'	NT

RATE OF BURNING

Conforms with requirements of NEMA TF-1, MIL-I-003190/3, and ASTM D372.

CHEMICAL RESISTANCE

Resistant to oils, acids, alkalies and most organic solvents. After more than 168 hours in the most commonly used aromatics, xylene and toluene, the dried sleeving substantially regains its original properties.

LOW TEMPERATURE

Bends without cracking at -25°C/-13°F.