
#### W23 Indoor/Outdoor Distribution Box

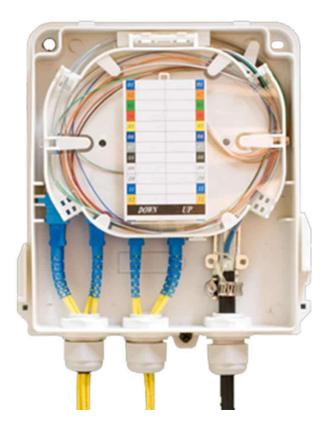

#### Description

This IP65 distribution box offers the ability to terminate 8 fibers housed in a robust ABS enclosure for indoor and outdoor applications. With the ability to use SC Simplex and LC Duplex adapter types offering a flexible solution to the end user, enabling them to incorporate a multi functional enclosure which allows easy access during installation or rework with no disturbance of the existing cable or fibers. In addition to the interchangeable adapters, the enclosure also offers up to 8 exit points for patching cables and 1 standard cable entry point for loose tube, tight buffer, preterminated and steel tape armored cable. Each enclosure has integrated strength member tie positions and bend radius protection with the addition of a removable front cover allowing for quick and easy installation.

#### Features and Benefits

- Up to 8 fibers
- Multiple adapter options available
- Integrated bend radius protection
- Removable cover for ease of installation
- Supplied with 12 heatshrink splice protectors
- Supplied with wall fixings and tie wraps

- Removable splice tray for easy installation
- 8 adapter positions
- Accepts loose tube, distribution and pre terminated cables
- Sealing glands for up to 8 exiting cables + 1 incoming cable
- ROHS, REACH & SvHC materials compliant
- Supplied with transit tubing











# AFL HYPERSCALE.

# **Applications**

- Data centers, premise installations, telecommunication
- Data communication and telecommunication networks
- Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- Indoor /outdoor applications

# Specifications

PRODUCT SPECIFICATION	
Height	210mm
Width	175mm
Depth	50mm
Net weight	0.44kg
Packed weight	0.52kg
Packaged dimensions	215mm x 182mm x 51mm
IP rating	IP65
Suitable for adapter type	SC Simplex LC Duplex
Number of fibers	8
Number of ports	8
Cable entry 20mm	1
Cable exit 20mm	2
Material	ABS
Colour	Light Grey
Operating temperature	-40°C to +60°C
Designed in accordance with	TIA/EIA 568.C, EN50173, IEC60304, IEC61754, , ISO/IEC 11801
Materials Compliant to	RoHS, Reach/SVHC

### **Ordering Information**

PART NUMBER	DESCRIPTION	LEGACY PART NUMBER
FXWCXXDXXX-23XX	IP Rated Wall Box Grey IP65 8 Port (SCS) with 1+2 25mm Glands UNLOADED	W23XXX00

#### Additional Images









